


## 15 KSI BOPs

### General Specifications

- Service: H2S
- MWP: 15,000 PSI
- Standard Operating Temperatures: -29°C to 121°C (-20°F to 250°F)
- Low Operating Temperatures: -45°C to 82°C (-50°F to 180°F)
- Ram Types: Blind, Shear, Slip, Pipe, Shear-Seal, Slip-Seal

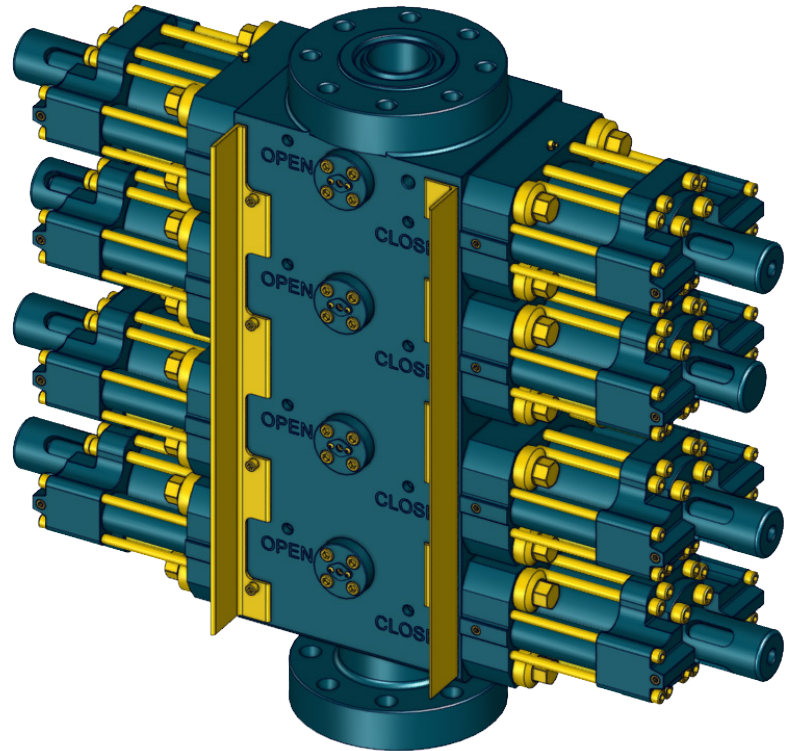

| Type   | Size   | Weight    | Dimensions   | Max Coil | Bore Size | Flanged Connections | Part Number |
|--------|--------|-----------|--------------|----------|-----------|---------------------|-------------|
| QUAD   | 5-1/8  | 6,526 lbs | 64 x 57 x 17 | 2 7/8    | 5.12      | BX-169              | 1126911     |
| QUAD   | 4-1/16 | 4,438 lbs | 48 x 56 x 15 | 2 3/8    | 4.06      | BX-155              | 1025784     |
| DUAL   | 5-1/8  | 3,923 lbs | 38 x 72 x 17 | 2 7/8    | 5.12      | BX-169              | 1114963     |
| DUAL   | 4-1/16 | 2,384 lbs | 28 x 63 x 15 | 2 3/8    | 4.06      | BX-155              | 1027175     |
| SINGLE | 5-1/8  | 2,330 lbs | 32 x 66 x 17 | 2 7/8    | 5.12      | BX-169              | 1169134     |
| SINGLE | 4-1/16 | 1,688 lbs | 29 x 63 x 15 | 2 3/8    | 4.06      | BX-155              | 1044079     |