


15 KSI BOPs

General Specifications

- Service: H2S
- MWP: 15,000 PSI
- Standard Operating Temperatures:
-29°C to 121°C (-20°F to 250°F)
- Low Operating Temperatures:
-45°C to 82°C (-50°F to 180°F)
- Ram Types: Blind, Shear, Slip, Pipe,
Shear-Seal, Slip-Seal

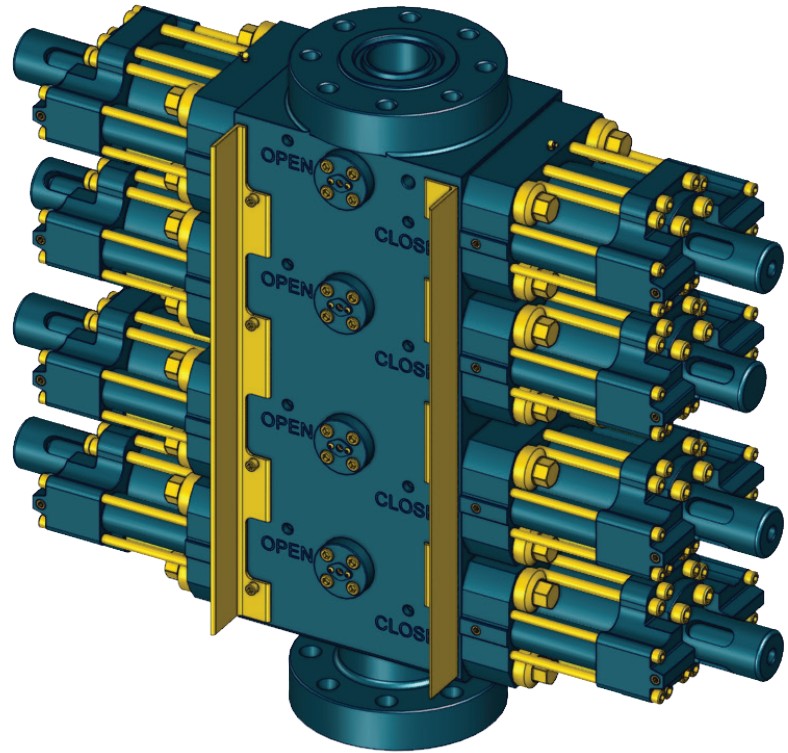

Type	Size	Weight	Dimensions	Max Coil	Bore Size	Flanged Connections	Part Number
QUAD	5-1/8	6,526 lbs	64 x 57 x 17	2 7/8	5.12	BX-169	1126911
QUAD	4-1/16	4,438 lbs	48 x 56 x 15	2 3/8	4.06	BX-155	1025784
DUAL	5-1/8	3,923 lbs	38 x 72 x 17	2 7/8	5.12	BX-169	1114963
DUAL	4-1/16	2,384 lbs	28 x 63 x 15	2 3/8	4.06	BX-155	1027175
SINGLE	5-1/8	2,330 lbs	32 x 66 x 17	2 7/8	5.12	BX-169	1169134
SINGLE	4-1/16	1,688 lbs	29 x 63 x 15	2 3/8	4.06	BX-155	1044079