


Petrobras Standard High Pressure Dual Port Hydraulic Hot Stabs.

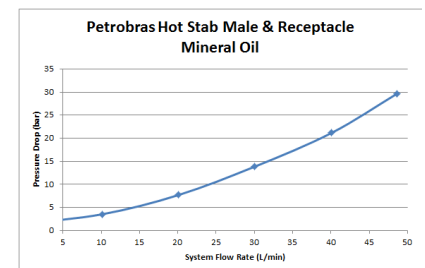

DESCRIPTION

The high pressure dual port conforms to the Petrobras hot stab profile. The hot stab has two 1/4" NPT ports and is rated to 10,000psi (690bar) working pressure.

The female receptacle also has 1/4" NPT ports. The female can be mounted by U-bolts around the body or a flange mounted variant is available.

FEATURES

- Petrobras Standard
- Dual Port 10kpsi (690bar) Max Pressure
- Up to 50 L/min (13.2 gpm) flow rate
- Pressure Balanced
- No check valves fitted

Petrobras Standard High Pressure Dual Port Hydraulic Hot Stabs.

SPECIFICATIONS

Working pressure	10,000 psi (690 Bar)
Flow Rate	Up to 50 L/min (13.2 gal(US)/min) in Mineral Oil
Fluid	Most hydraulic fluids and gases.
Weight in air	3.5kg (male stab with D-type handle)
Port sizes	A and B ports 1/4" NPT
Flow path	Nominal path 6mm diameter throughout
Materials	Inconel body
Handle	D-type (replaces T-bar & Fish Tail)

WHAT'S IN THE BOX

Dependant on Part # Ordered

PART NUMBERS & OPTIONS

A036-037-410/01	Male hot stab complete with D-Type Handle
A036-037-410/02	Male hot stab complete with T-bar Handle
A036-037-410/SK	Basic Spares Kit
A036-037-403/01	Seal Sizing Kit
A036-037-470/01	Female Receptacle
A036-037-470/G	Female Receptacle with Pressure Gauge
A036-037-025/01	Receptacle Mount Plate
A036-037-413/01	Flange Mounted Receptacle
A036-037-430/01	Dummy Receptacle (Plastic)
A036-037-450	Blind Test Male Hot Stab

