


1" Nominal Bore Hot Stab

The 1" nominal bore hydraulic hot stab complies with the specification of ISO 13628-8 Type B. The hot stab is pressure rated to 400 bar and available in a variety of different handle types. The hot stab has a 1" BSPP hydraulic port.

The receptacle also has a 1" BSPP hydraulic port, and is fitted with a mounting flange for installation on client equipment.

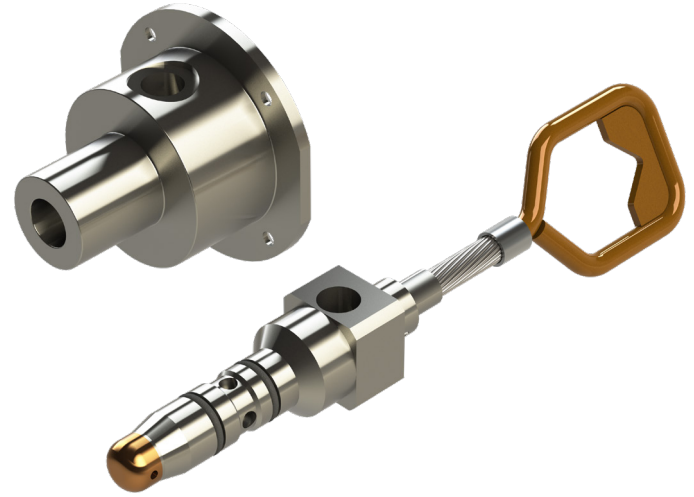

Specifications

ISO 13628-8 Type A

Working Pressure:	400 bar
Working Fluid:	Most hydraulic fluids and gases to 207 bar
Weight:	4.4 kg hot stab, 1.1 kg receptacle
Hydraulic Ports:	1" BSPP
Flow Path:	nominal diameter 21 mm
Materials:	Duplex Stainless Steel UNS S31803

Part Numbers

A036-054-102/01	1" Hot Stab Assembly with D-Type Handle
A036-054-102/02	1" Hot Stab Assembly with Fishtail Handle
A036-054-102/SK	Seal Kit for 1" Hot Stab
A036-054-311/01	1" Receptacle
A036-054-311/02	1" Receptacle with case
A036-054-262	1" Dummy Stab

Features

- Industry Standard
- ISO 13628-8 Type A
- Pressure balanced
- 400 bar working pressure