

# Hot Stab IHPU

The hot stab IHPU comprises of a 10k IHPU supplied with a 2 twin port 10 kpsi hot stab and receptacle. The system can be used for numerous Subsea applications including pressure testing, BOP operation, fluid transfer and hot stab operations with the capability of directional control ranging from 1,150–10,000psi which can be operated proportionally.


The hot stab supplied conforms to the industry standard ISO 13628-8 Type A and can be fitted with different handles to suit the customer's requirements.

## Specifications

Max Input Pressure:	210 Bar (3,000 psi)
Max Input Flow:	40 LPM (9 GPM)
Max Output Pressure:	690 Bar (10,000 psi)
Max Output Flow:	9 LPM (2 GPM)
Fluids:	Water / Glycol Hydraulic / Mineral Oils

## Part Numbers

A036-037-501	Hot Stab IHPU with Flow Meter
--------------	-------------------------------

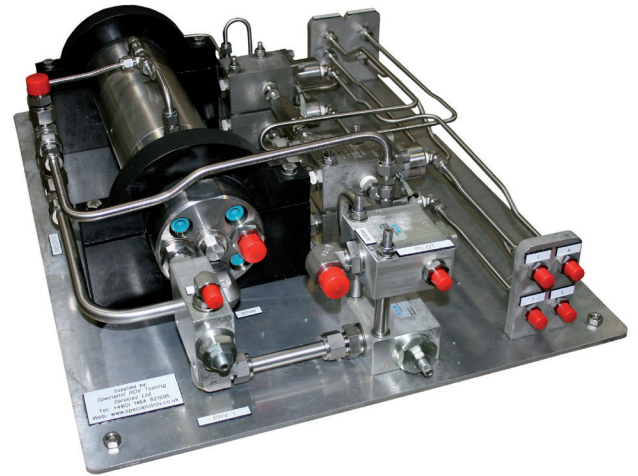

## Features

- Isolated Hydraulic Power Unit
- Directional Control
- 690 bar (10,000psi) max output
- ISO 13628-8 Type A
- Integral Sealing Valves
- Pressure Balanced