


API-17H Quad-Port 10K Hot Stab

The FET Quad-Port Hot Stab conforms to API-17H, 35mm Type 1, and comes complete with integral sealing valves. The male has eight check valves set inside the male and female bodies. These valves are 0.2 bar inflow with 2.6 bar outflow (i.e., will not dump the ROV compensator pressure). This hot stab minimises ROV oil leakage and water ingress, and prevents under-pressure in the hoses, etc.

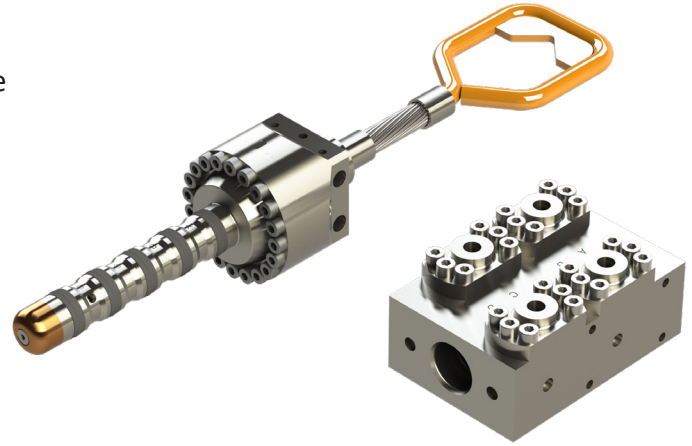

Specifications

Pressure rating:	690 Bar (10,000 psi)
Max Water Depth:	3,000 m (10,000 ft)
Body Material:	Duplex UNS S32750 (Male & Female)
Seal Material:	Ecorubber (NBR)
Output Ports:	1/4" NPT
Male body diameter:	35 mm
Check Valves:	2.6 bar out, 0.6 bar in
Handle Type:	D-Type (other types available)

Part Numbers

A036-037-606/01	API-17H Quad Port Hot Stab Male 10k
A036-037-625/01	API-17H Female Receptacle
A036-037-608/01	API-17H Dummy Plug
A036-037-061/01	Seals & Assembly Tools

Features

- Conforms to API-17H Type 1 (35mm) 4 port hot stab
- Rated to 690 bar (10,000 psi)
- Integral Sealing Valves
- Pressure Balanced