


## Stripper/Packers

### General Specifications

- Service: H2S
- Standard Operating Temperatures: -29°C to 121°C (-20°F to 250°F)
- Low Operating Temperatures: -45°C to 82°C (-50°F to 180°F)
- Various Flanged Connections and Quick Union options available
- Top and Bottom Brass can be exchanged through the window on most models

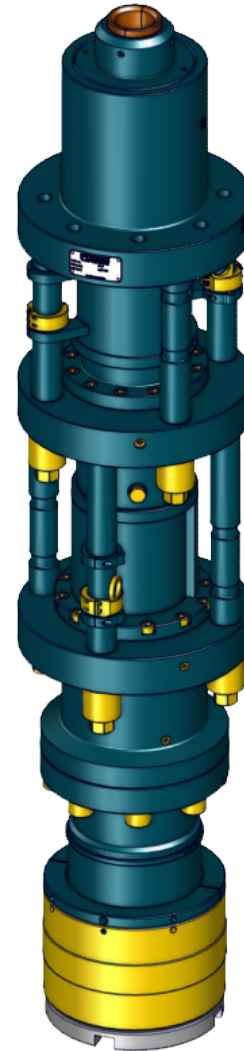

Type	Pressure	Bore Size	Connections	Max Coil	Weight*	Dimensions*
Dual	15 KSI	4 1/16"	BX Flange or Unions 3 1/16" - 5 1/8"	2 7/8"	1,750 lbs.	72" x 17"
Single	15 KSI	4 1/16"		2 7/8"	1,035 lbs.	43" x 17"
Dual	10 KSI	4 1/16"		2 7/8"	1,750 lbs.	72" x 17"
Single	10 KSI	4 1/16"		2 7/8"	1,035 lbs.	43" x 17"
Single	10 KSI	3 1/16"		2"	292 lbs.	34" x 12"

\*Varies with connection selected.